


PLAN
Scale: $\frac{1}{2}'' = 1'-0''$

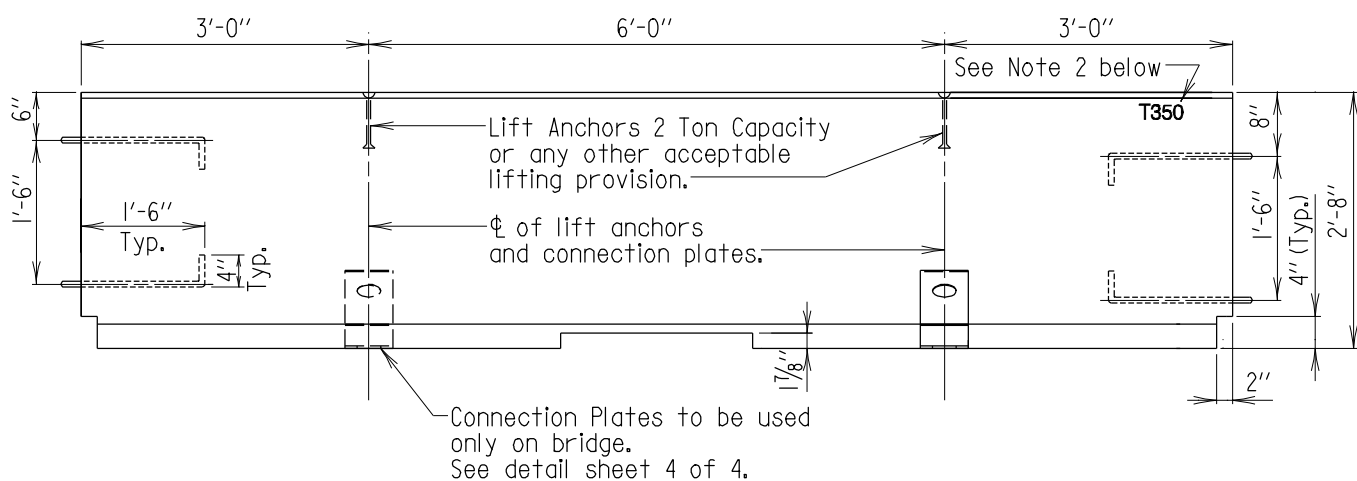

END A

END B

ELEVATION
Scale: $\frac{1}{2}'' = 1'-0''$

Notes:

- One connector pin shall be furnished with each barrier. The cost of the connector pin shall be incidental to the item precast temporary concrete barrier.
- All barriers shall have "T350" imprinted on top end of barrier. Imprint shall have a minimum depth of $\frac{1}{4}''$ and a minimum height of 2".

APPROVAL	
<i>L.S. Friedman</i> DIRECTOR	OFFICE OF STRUCTURES
DATE: 6/15/84	
REVISIONS	
SHA	FHWA
4-4-02	.
5-21-04	.
6-28-04	.
8-5-04	.

FHWA APPROVAL
DATE: 1-23-85

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF STRUCTURES

TEMPORARY PRECAST DOUBLE
FACE F-TYPE CONCRETE BARRIER

STANDARD NO. M(5.10)-84-158

SHEET 2 OF 4

MISCELLANEOUS